


VIENA ELEMENTA MATERIĀLU SARAKSTS														
ELEMENTA NR.	SKAITS	MATERIĀLS			SVARS (kg)		TILPUMS (m³)							
SP-1	1	C30/37 XC2			1512.0		0.63							
STIEGROJUMS														
LOCĪJUMS	SKAITS	KLASE	DIAM	L	a	b	c	d	e	u	v	D	kg/viens	kg/kopā
72	8	B500B	12	1770	163	630	165	630				48	1.6	12.6
A	4	B500B	12	840	845								0.7	3.0
A	12	B500B	12	1430	1430								1.3	15.2
D	8	B500B	8	1000	400	240	400					32	0.4	3.2
U	8	B500B	12	2470	163	865	280	865	280			48	2.2	17.6
					163									
STIEGROJUMA SVARS KOPĀ (kg):													51.7	
ELEMENTA KOPĒJAIS SVARS (kg):													1548.2	

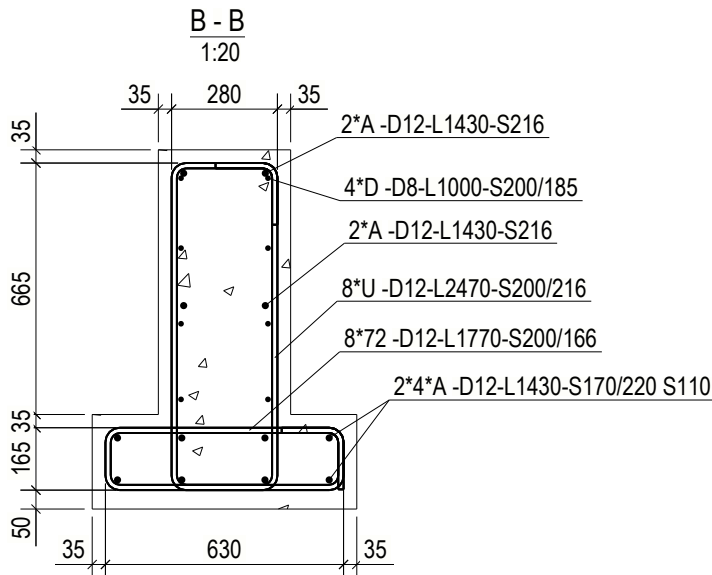

PASŪTĪTĀJS: Biedrība "Aizvējā"			
PROJEKTĒTĀJS: www.sitera.lv SIA "SITERA" e-pasts info@sitera.lv Tālr. +371 2945 0018 Būvkomers. reģ. Nr. 13726			
OBJEKTS: Dienas aprūpes centra "Aizvējā" izveide Tāšu iela 28, Liepāja LĪGUMA NR.: 2-9.19./2025			
STADIJA: BP	INŽENIERRISINĀJUMU DAĻA BŪVKONSTRUKCIJAS		DAĻA: BK
BDV.	ĒRIKS PUNGA 3-02057		20.03.2026
INŽ.	RALFS RĀTS		20.03.2026
INŽ.			20.03.2026
MĒROGS: 1:20	LAPA: STABVEIDA PAMATA SP-1 DETALIZĀCIJA		LAPA: BK0-301