
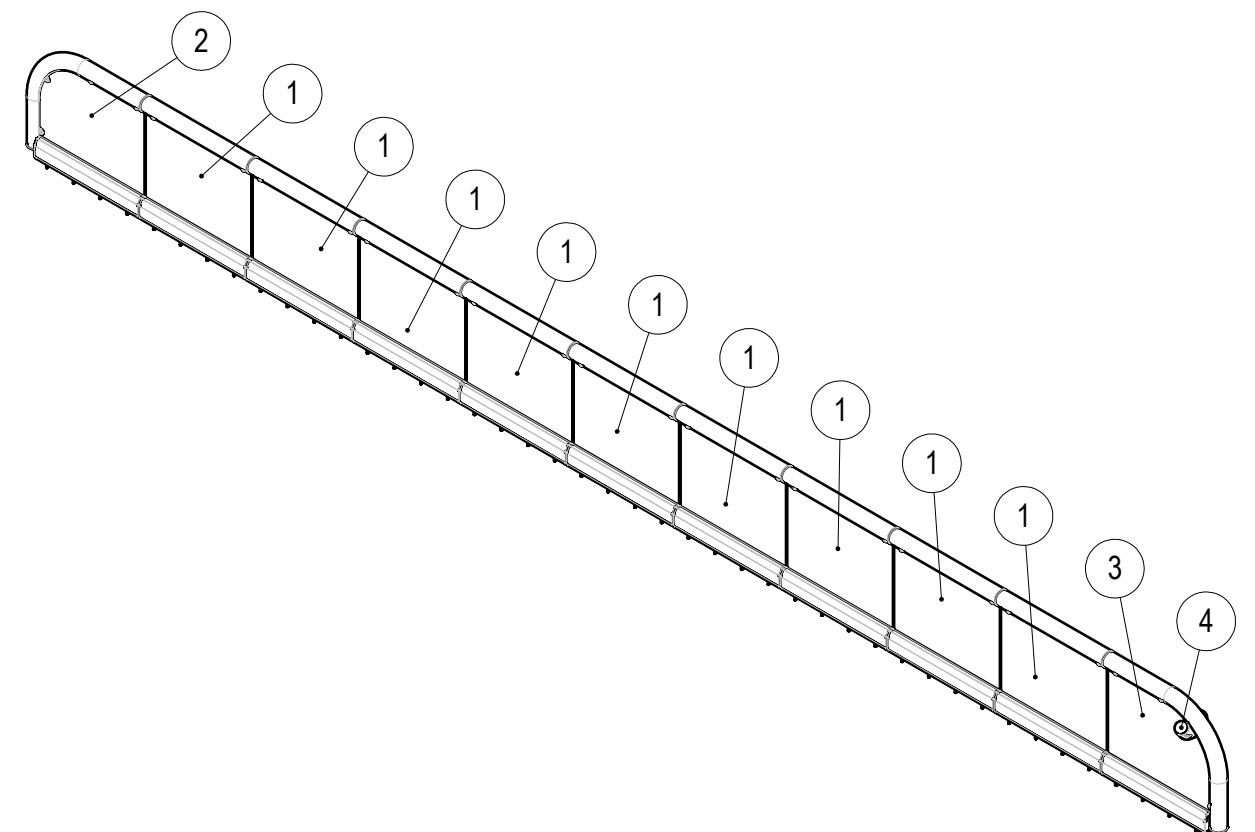
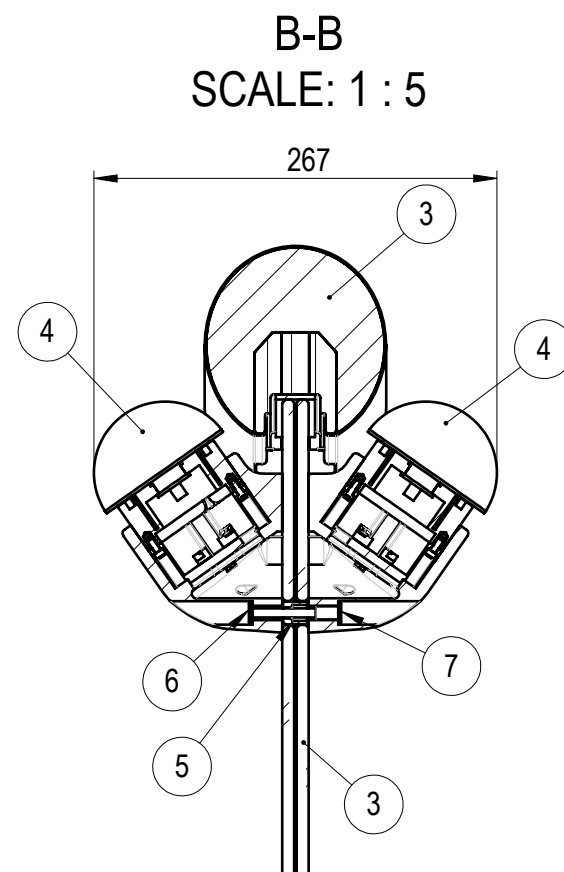


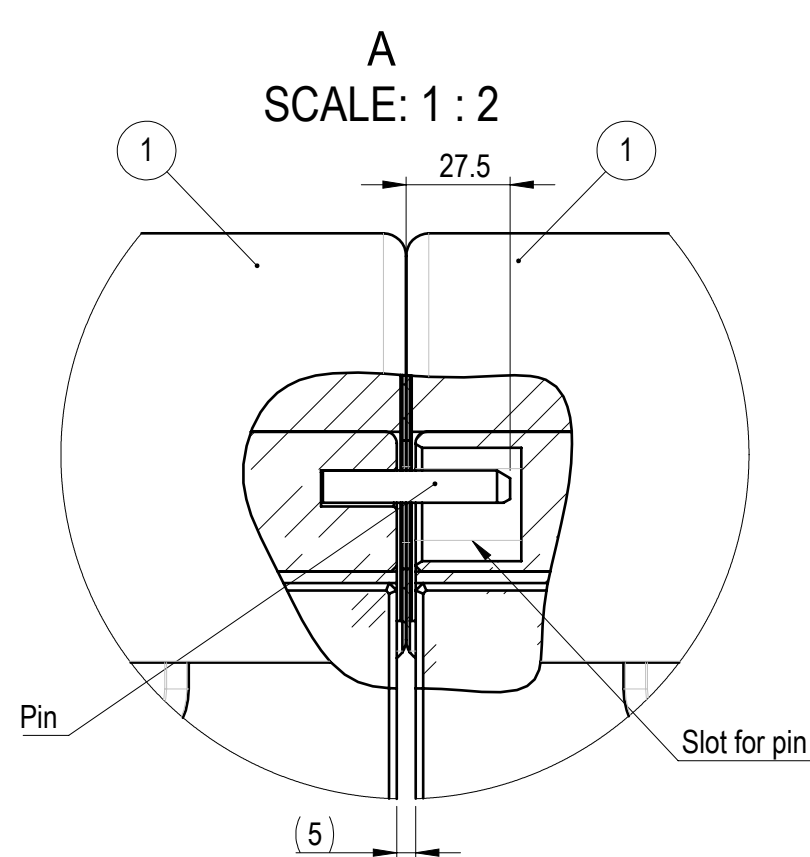

and finished with segment **2**. As shown in View A, the slotted end must be installed first, followed by insertion of the pin end into the previous segment slot.

NO.	PART NO	DESCRIPTION	MATERIAL	PROCESSING	REVISION	WEIGHT	QTY
1	105-01410-00	Railing segment 1 assembly	-	ASY		50.90	9
2	105-01420-00	Railing segment 2 assembly	-	ASY		50.73	1
3	105-01430-00	Railing segment 3 assembly	-	ASY		50.48	1
4	105-01500-00	Push button assembly	-	ASY		0.91	2
5	105-01400-01	Spacer tube	PE 500/black	MCH		0.00	3
6	Furniture screw M6x50	Hex socket cap furniture screw M6x50	Steel w/ Brass coating	COTS		0.01	3
7	Triggers_s2-6-15	Furniture sleeve nut M6x15	Steel w/ Brass coating	COTS		0.01	3
		MATERIAL -	WEIGHT 561.196 Kg	DEBURR AND BREAK SHARP EDGES DO NOT SCALE DRAWING		REVISION	DATE 08.06.2026
		SURFACE PROTECTION -	MACHINING ISO 2768 mK	THERMAL CUTTING ISO 9013 221	WELDING ISO 13920 BF	SCALE 1:50	FORMAT A3
	NAME	SIGNATURE	PART NO. 105-01400-00				 
Designed by	A. Menkins						
Drawn by	D. Dislers		DESCRIPTION Railing assembly				SHEET 1/1
Technical ref.							